



JCB Teletruk Variable Reach Forklifts

Lift capacities of 6,000 and 7,000 lbs @ 24" load centre

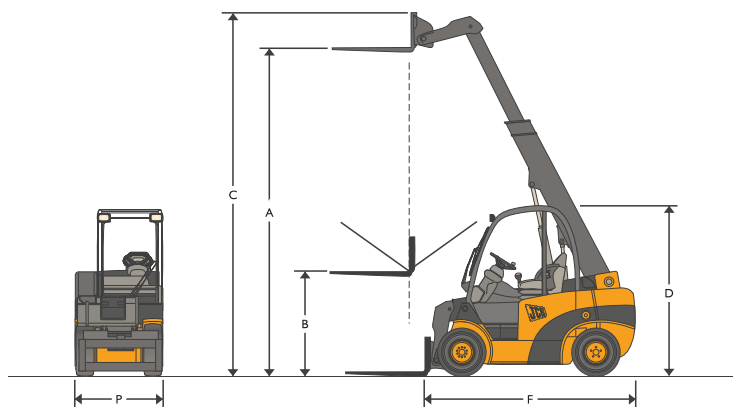

Model	Ref	TLT30DHL	TLT35D	TLT35D 4x4
Lift capacity @ 24 in load centre		6 000 lbs	7 000 lbs	7 000 lbs
Lift capacity @ maximum forward reach		1 089 lbs	3 250 lbs	3 250 lbs
Maximum reach with boom horizontal		130 in	95.6 in	96.4 in
Lift height	A	16 ft 10 in	14 ft	14 ft
Free lift (standard)	B	48 in	47.6 in	53 in
Height boom extended	C	18 ft 8 in	16 ft 3 in	16 ft 5 in
Height of overhead guard (std/low)	D	88.5/83	88.5/83 in	90.5/86.6 in
Length to fork face	F	133 in	118 in	126 in
Maximum width	P	50 in	50 in	55 in
Underclearance		6.0 in	6.0 in	7.0 in
Turning radius		114 in	114 in	138 in
Aisle width 90° stacking		184 in	184 in	207 in
Engine type		Diesel	Diesel	Diesel
Engine model		Kohler	Kohler	Kohler
Gross engine output		62 hp	62 hp	62 hp
Rated rpm		2 600	2 600	2 600
Weight unladen		11 860 lbs	11 243 lbs	12 125 lbs

Because of our constant dedication to product improvement, all specifications are subject to change without notice.
 — All JCB Teletruk meets or exceeds all ANSI B56.1 safety standards. —

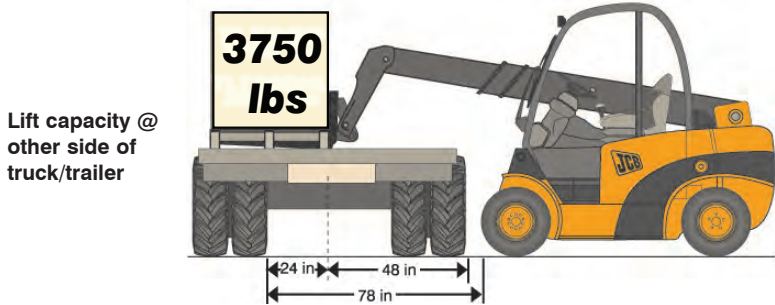

Lift capacity @ other side of truck/trailer