



STMSSA-PR

5500 lbs Capacity

SERIES III





www.sellickequipment.com

STM55A-PR TRUCK MOUNTED FORKLIFT

Model	Ref	STM55A-PR Series III	
		120" Lift	144" Lift
Lift capacities @ 24" load center		5,500 lbs/2,500 kg	
Base operating weight (without forks)		7,645 lbs/3,468 kg	7,840 lbs/3,556 kg
Overall length with forks (without forks)	A	120"/3,048 mm (106"/2,692 mm)	
Overhang*		74"/1,880 mm	
Overall width	B	100.5"/2,553 mm	
Height to top of OHG	C	101"/2,565 mm	
Frame opening	D	60"/1,524 mm	
Outside turning radius		122"/3,099 mm	
Mast sideshift		6"/152 mm	
Mast underclearance	E	10"/254 mm	
Mast tilt - forward	F	12°	
Mast tilt - rearward	G	8°	
Gradeability		25%	
Wheelbase	H	74"/1,880 mm	
Tire size		31 - 15.5, 10 x 16.5	
Engine build/model		Kohler KDI 1903TCR Tier 4 compliant	
Engine type		Diesel, Turbocharged, Electronic	
Cylinders		3	
Engine output		56 hp	
Transmission type		Hydrostatic	
*Minimum Achievable			
Because of our constant dedication to product improvemet, all specifications are subject to change without notice.			
-All Sellick truck-mounted forklifts meet or exceed ANSI/ITSDF B56.14 - 2015 Standards for Vehicle Mounted Forklift Trucks.-			

Diagram illustrating the side view of the STM55A-PR Series III forklift. Key dimensions labeled include: F (Mast tilt forward angle), G (Mast tilt rearward angle), C (Overall height to top of OHG), E (Mast underclearance), H (Wheelbase), and A (Overall length with forks).

Diagram illustrating the front view of the STM55A-PR Series III forklift. Key dimensions labeled include: D (Frame opening) and B (Overall width).

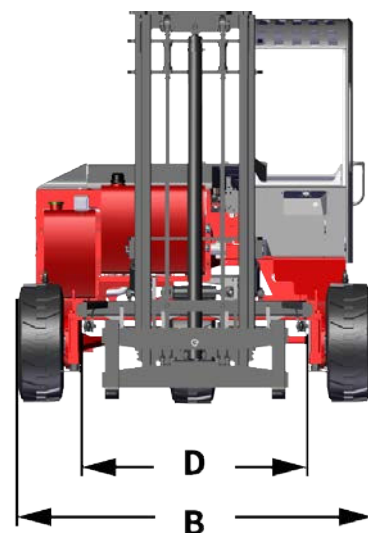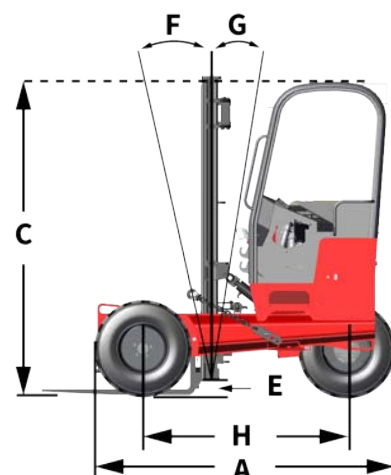

www.sellickequipment.com



Sellick Equipment Limited
 2131 Roseborough Rd
 Harrow, ON, Canada N0R 1G0
 519-738-2255