



STM SERIES II/III

5500 - 7000 lbs Capacity



www.sellickequipment.com

>> EFFICIENCY ON THE MOVE >>



STM SERIES II/III


Introducing the Sellick STM Series II/III truck-mounted forklift. With a focus on operation, service and affordability the STM Series II/III is the solution for all your operation's logistical needs.

The STM Series II/III maintains the quality and durability of previous models while including innovations created from insights in real world applications. This is backed by unparalleled customer support including a 2 year warranty program fulfilled by our self-servicing dealer network.

After countless discussions with crew managers, operator's, and company owner's we've focused on creating a machine that excels in all areas.

Some key features include:

- **Operator Experience** - Excelling in comfort, visibility and safety to provide a seamless working experience.
- **On The Job** - Quick and simple mounting/dismounting for delivery to the jobsite.
- **Company Owners** - A lighter more affordable machine that fits on a wider variety of existing trucks and trailers.

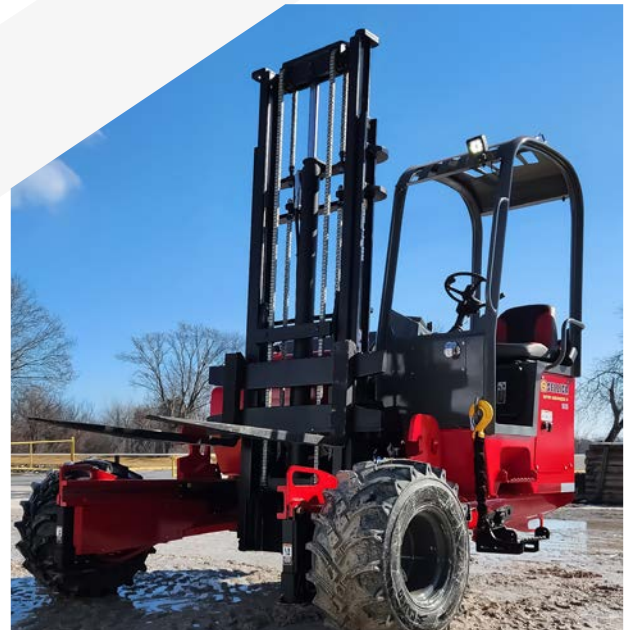

>> EASE ON THE OPERATOR >>



Comfortable and Safe Operator Experience

- Optimized visibility
- Lower sound levels
- Ergonomic controls
- Ease of operation with automotive control
- System display provides daily walk-around assistance and information on machine status
- Platform meets or exceeds ANSI B56.14 ROPS/FOPS safety standards

ROPS Certified Enclosure



System Display and Controls



Visibility



>> EFFICIENCY ON THE JOB >>



Mounting and Transport

- Extensive weight reduction from previous models, allowing for smooth, efficient transport
- Fits a wider variety of trucks and trailers with existing mount systems
- Standing Start System enables starting the machine from the ground while the truck is mounted, providing the opportunity to preheat in colder climates and relax the chains for dismounting
- The patented Sellick Quick-Clip system allows for fast and easy transport chain adjustment when mounting to different trucks and trailers
- 3rd brake light reduces up to 30% of rear end accidents while in transport




Standing Start System



3rd Brake Light



Quick-Clip Transport Chain

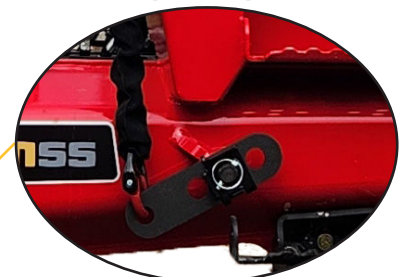

Engine

- KOHLER KDI 1903TCR Tier 4, 56 HP, direct injection diesel engine
- Exceptional low end torque
- No exhaust aftertreatment, Diesel Particulate Filter (DPF) or Diesel Exhaust Fluid (DEF) required
- Cold weather preheat and starting aid



Drive System

- Trac-Loc hands-free traction control
- Full-time anti-stall
- Automotive controls with inching/brake pedal for precise control



On-Board Diagnostics Display

- A multi-function LCD digital display that includes fuel level, engine coolant temperature, system voltage, rpm and hour meter reading
- Real-time system diagnostics that delivers clear text formatted messages for troubleshooting, operational guidance and maintenance reminders
- Selectable Drive Modes (Basic, Normal, Advanced and Performance) tailor machine performance to the application and operating conditions



Filter Access and Drip Pan

- Easily removable panel
- Provides easy access for service and maintenance
- Built-in drip pan



Mast Bearings

- Reliable mast bearing design in a lighter, compact form
- Rubstrips that keep bearing pathways protected from debris
- Easier access for service, reducing bearing replacement cost
- Greaseable bearings for extended service life




Hood Design

- Combined hood and rear panel opening allows for easy access to the engine and components
- Tapered to improve visibility



Directional Rocker Pedal Option

- Effortlessly switch between forward and reverse with a simple toe-heel motion keeping the operator's hands free to focus on steering and mast controls.
- Combine it with the optional European hydraulic lever sequence to allow an easier fit in mixed fleets

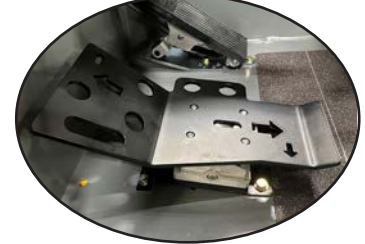

All-Weather Enclosed Cab Option

- Industry leading enclosed cab with heater and windshield wiper provides increased comfort and visibility in cold or wet conditions.
- Dual sliding side windows provide adjustable airflow, and easy communication with jobsite personnel.



>> TECHNICAL SPECIFICATIONS >>



4-Way




A one-touch button seamlessly switches from standard to 4-Way mode, enabling the multi-directional capability needed to handle long loads in tight spaces.



Model	Ref	STM55A SERIES II			STM55A-4W SERIES II	
		80" Lift	120" Lift	144" Lift	120" Lift	144" Lift
Lift capacities @ 24" load center		5,500 lbs/2,495 kg			5,500 lbs/2,495 kg	
Base operating weight (without forks)		5,760 lbs/2,613 kg	6,025 lbs/2,733 kg	6,175 lbs/2,801 kg	6,895 lbs/3,128 kg	7,045 lbs/3,196 kg
Overall length (without forks)	A	98"/2,489 mm			98"/2,489 mm	
Overall length (with forks)	A ²	114"/2,895 mm			114"/2,895 mm	
Overhang		60"/1,524 mm			60"/1,524 mm	
Standard overall width	B	100.5"/2,553 mm			101"/2,565 mm	
Overall width without forks (4W mode)	B ²	-			97"/2,464 mm	
Overall width with 48" forks (4W mode)	B ³	-			111"/2,819 mm	
Height to top of OHG	C	101"/2,565 mm			103"/2,616 mm	
Frame opening	D	60"/1,524 mm			58.5"/1,486 mm	
Outside turning radius (standard)		108"/2,743mm			108"/2,743mm	
Mast underclearance	E	12"/305 mm	10"/254 mm	10"/254 mm	10"/254 mm	
Mast sideshift		6"/152 mm				
Mast tilt - forward	F	12°				
Mast tilt - rearward	G	8°				
Gradeability		25%				
Wheelbase	H	66"/1,676 mm				
Tire size - front/rear		31x15.5/31x15.5			31.5x13/31x15.5	
Engine build/model		Kohler KDI 1903TCR Tier 4 compliant				
Engine type		Diesel, turbocharged, electronic				
Cylinders		3				
Engine output		56 hp				
Transmission type		Hydrostatic				

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

-All Sellick truck-mounted forklifts meet or exceed ANSI/ITSDF B56.14 - 2015 Standards for Vehicle Mounted Forklift Trucks.-

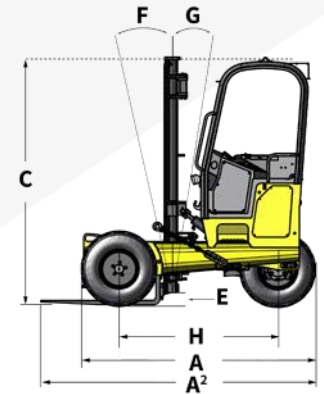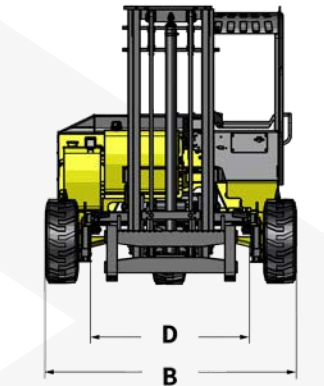

>> TECHNICAL SPECIFICATIONS >>



Pantograph


The pantograph reach model allows loading and unloading from the same side of the truck or trailer, improving safety and operational efficiency.



Model	Ref	STM55A-PR SERIES III		STM55A-4WPR SERIES III	
		120" Lift	144" Lift	120" Lift	144" Lift
Lift capacities @ 24" load center		5,500 lbs/2,495 kg		5,500 lbs/2,495 kg	
Base operating weight (without forks)		7,645 lbs/3,468 kg	7,840 lbs/3,556 kg	8,240 lbs/3,738 kg	8,365 lbs/3,794 kg
Overall length (without forks)	A	106"/2,692 mm		106"/2,692 mm	
Overall length (with forks)	A ²	120"/3,048 mm		122"/3,099 mm	
Overhang		74"/1,880 mm		69"/1,753 mm	
Standard overall width	B	100.5"/2,553 mm		101"/2,565 mm	
Overall width without forks (4W mode)	B ²	-		105"/2,667 mm	
Overall width with 48" forks (4W mode)	B ³	-		119"/3,023 mm	
Height to top of OHG	C	101"/2,565 mm		103"/2,616 mm	
Frame opening	D	60"/1,524 mm		58.5"/1,486 mm	
Outside turning radius (standard)		122"/3,099mm		122"/3,099mm	
Mast underclearance	E	10"/254 mm			
Mast sideshift		6"/152 mm			
Mast tilt - forward	F	12°			
Mast tilt - rearward	G	8°			
Gradeability		25%			
Wheelbase	H	74"/1,880 mm			
Tire size - front/rear (Optional)		31x15.5/31x15.5		31.5x13/31x15.5	
Engine build/model		Kohler KDI 1903TCR Tier 4 compliant			
Engine type		Diesel, turbocharged, electronic			
Cylinders		3			
Engine output		56 hp			
Transmission type		Hydrostatic			

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

-All Sellick truck-mounted forklifts meet or exceed ANSI/ITSDF B56.14 - 2015 Standards for Vehicle Mounted Forklift Trucks.-

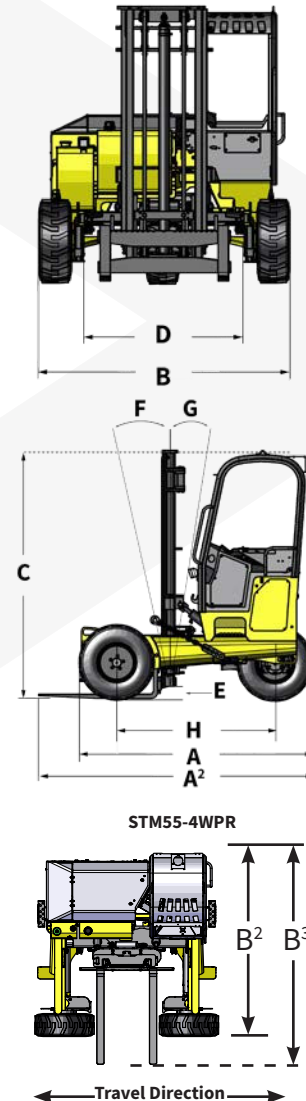


>> TECHNICAL SPECIFICATIONS >>



STM70A

Built for higher-capacity performance, the STM70 provides a 7,000 lb lifting capability designed to support heavier loads and extended load centers.

Model	Ref	STM70A SERIES III	
		120" Lift	144" Lift
Lift capacities @ 24" load center		7,000 lbs/3,175 kg	
Base operating weight (without forks)		6,595 lbs/2,991 kg	6,705 lbs/3,041 kg
Overall length (without forks)	A	106"/2,692 mm	
Overall length (with forks)	A ²	122"/3,099 mm	
Overhang		69"/1,753 mm	
Standard overall width	B	100.5"/2,553 mm	
Height to top of OHG	C	101"/2,565 mm	
Frame opening	D	60"/1,524 mm	
Outside turning radius (standard)		122"/3,099mm	
Mast underclearance	E	10"/254 mm	
Mast sideshift		6"/152 mm	
Mast tilt - forward	F	12°	
Mast tilt - rearward	G	8°	
Gradeability		25%	
Wheelbase	H	74"/1,880 mm	
Tire size - front/rear (Optional)		31x15.5/31x15.5	
Engine build/model		Kohler KDI 1903TCR Tier 4 compliant	
Engine type		Diesel, turbocharged, electronic	
Cylinders		3	
Engine output		56 hp	
Transmission type		Hydrostatic	

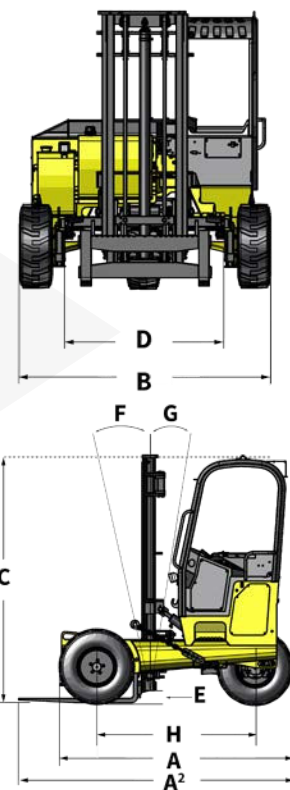

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

-All Sellick truck-mounted forklifts meet or exceed ANSI/ITSDF B56.14 - 2015 Standards for Vehicle Mounted Forklift Trucks.-

>> OVER HALF A CENTURY
OF EXCELLENCE >>



Through The Years

Beginning in 1969 with the conversion of a Ford 4500 industrial tractor into a 6000 lbs outdoor forklift, Sellick Equipment has grown to include an entire product line up with the support of a wide network of self servicing North American dealer locations. Now an industry leader with a rich history and a vision for the future, Sellick has and always will provide unparalleled service and support for our current and future customers.



**>> CONQUER ANY
TERRAIN >>**



www.sellickequipment.com



Sellick Equipment Limited
2131 Roseborough Rd
Harrow, ON, Canada N0R 1G0
519-738-2255